

Nexus Metalwork

泰州力信五金制造有限公司

Work Tirelessly to Make Contribution
to Global Green Transition



Product Brochure

- Edge Protection&Fencing System
- Collapsible Stillage
- Scaffolding Couplers&Screw Jacks

NEXUS





About NEXUS — Metalwork

Taizhou Nexus Metalwork Co.,Ltd located in Jiangyan City,Jiangsu Province,China,2 hours far from Shanghai Pudong International Airport by car, with 20 years professional experiences in manufacturing BS EN 13374 standard edge protection system,site hoarding system,fencing system,vehicle&pedestrian access gate,BS EN 13626 stillage, and BS EN748B scaffolding coupler,screw jack.

20+

Years in the industry

5,000m²

Plant areas

10+

Professional technicians

6

Production lines

20+



Nexus Metalwork

Our Advantage — Metalwork

A decade of supplying Haki,
Mj-Gerüst, ALTRAD

Inspect **15%** more of our output
than the competition

Provide quotation within **24 hours**,
make sample within **7 days**

We own mature drop forging production line, laser cutting production line and automatic welding production line.

Our heavy-duty drop forged double and swivel couplers are fully compliant and tested to **BS EN74BB standard**


Site security guardrail systems to **BS EN13374** standard.

Stillages to **BS EN 13626** standard.

1-Forging



2-Laser Cutting



3-Welding



4-Polishing



5-Hot Dip Galvanized



etalwork

「SCAFFOLDING COUPLER」

Make scaffolding more sturdy and safe to use with peace of mind



SCAFFOLDING COUPLER

Scaffolding couplers are used to join two scaffold tubes at various angles, providing a secure and stable connection.

- BS EN74-1-2022 CLASS BB Standard
- Hot dip galvanizing EN ISO 1461 65µm or electro galvanized
- Fixed or swivel type
- Easy of operation and portability
- A strong and reliable connection



Specification	Scaffolding D/F Double Coupler
Item No	NX4848DC
Size	48*48MM
Weight	1.15KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Swivel Coupler
Item No	NX4848SC
Size	48*48MM
Weight	1.35KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Right Angle Coupler
Item No	NX4876DC
Size	48*76MM
Weight	1.68KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Rotating Coupler
Item No	NX4876SC
Size	48*76MM
Weight	2.05KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Fixed Coupler
Item No	NX4889DC
Size	48*89MM
Weight	2.27KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Swivel Coupler
Item No	NX4889SC
Size	48*89MM
Weight	2.67KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Fixed Coupler
Item No	NX6060DC
Size	60*60MM
Weight	1.5KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Swivel Couple
Item No	NX6060SC
Size	60*60MM
Weight	1.75KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding 90 degree Couple
Item No	NX6076DC
Size	60*76MM
Weight	1.91KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized




Specification	Scaffolding Swivel Couple
Item No	NX6076SC
Size	60*76MM
Weight	2.07KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Double Coupler
Item No	NX6089DC
Size	60*89MM
Weight	2.5KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Swivel Coupler
Item No	NX6089SC
Size:	60*89MM
Weight	2.78KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized

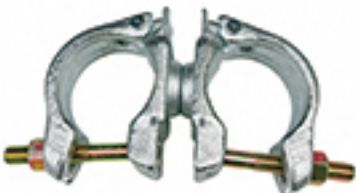

Specification	Scaffolding Swivel Coupler
Item No	NX7676SC
Size	76*76MM
Weight	2.23KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Swivel Coupler
Item No	NX7689SC
Size	76*89MM
Weight:	3.07KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized




Specification	Scaffolding Half Coupler
Item No	NX76HC
Size	76MM
Weight	1.2KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Single Coupler With Wing Nut
Item No	NX76HC
Size	76MM
Weight:	1.22KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Paralleled Coupling
Item No	NX4848PC
Size	48*48MM
Weight:	1.4KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized

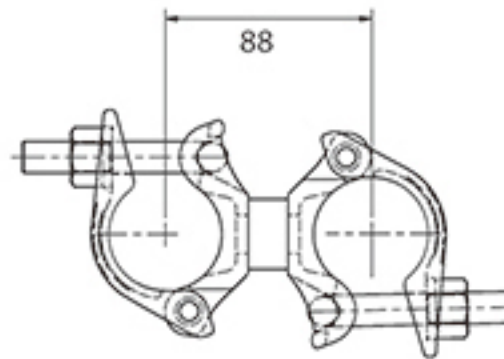

Specification	Lift Crane Coupler
Item No	NXLCC001
Size	Plate:92*36*10mm,Two half couplers for 48.3mm tube
Weight	1.52KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Lift Crane Coupler
Item No	NXLCC002
Size	Plate:40*160*20*20*12mm,Three half couplers for 48.3mm tube
Weight	2.1 KGS
Surface finishing	Electro Galvanized/Hot Dip Galvanized





Specification	Wall Tie Bracket
Item No	NXWTB001
Size	100*100*10*100mm,Single half coupler for 48.3mm tube
Weight	2.0 KGS
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Wall Tie Bracket
Item No	NXWTB002
Size	250*100*10*333mm,Single half coupler for 48.3mm tube
Weight	3.1 KGS
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Wall Tie Bracket
Item No	NXWTB003
Size	250*100*10*333mm,Two half couplers for 48.3mm tube
Weight	3.65 KGS
Surface finishing	Electro Galvanized/Hot Dip Galvanized

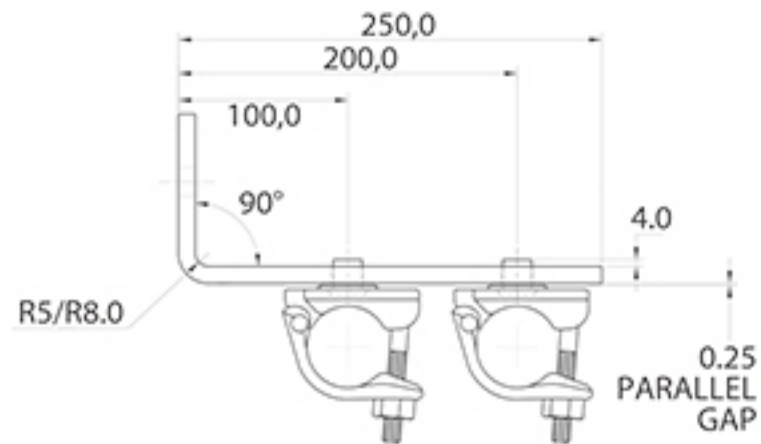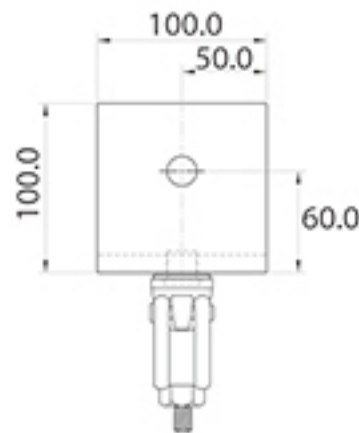

Specification	Scaffolding Ladder Bracket
Item No	NXSLB001
Size	Span:300mm,single coupler for 48.3mm tube
Weight	3.38KG
Surface finishing	Electro Galvanized



Specification	Scaffolding Ladder Bracket
Item No	NXSLB002
Size	Span:400mm,single coupler for 48.3mm tube
Weight	3.44KG
Surface finishing	Electro Galvanized



Specification	Fork Head
Item No	NXFH001
Size	Width:145mm,Length:230mm,Height:170mm
Weight	2.3KG
Surface finishing	Electro Galvanized

「SCAFFOLDING SCREW JACK」

Make scaffolding more sturdy and safe to use with peace of mind

SCAFFOLDING SCREW JACK

Scaffolding Screw Jack is used in scaffolding systems to adjust the height and level of scaffolding structures.


- Hot dip galvanizing EN ISO 1461 65μm or electro galvanized
- Fixed or swivel type
- Q355B Seamless Steel Tube



Specification	Casting Nut
Item No	NXC�001
Size	Length:200MM,Diameter:48mm
Weight	1.02KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized





Specification	Casting Nut
Item No	NXC�002
Size	Length:150MM,Diameter:38mm
Weight	0.52KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Casting Nut
Item No	NXCN003
Size	Length:150MM,Diameter:38mm
Weight	0.545KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Casting Nut
Item No	NXCN004
Size	Length:180MM,Diameter:38mm,Match to M10 bolt
Weight	0.963KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized

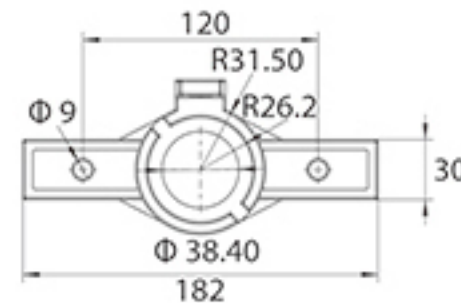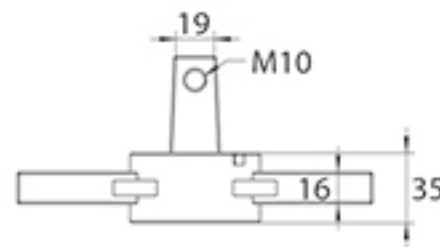

Specification	Hollow Scaffolding Screw Jack
Item No	NXSBJ001
Size	Diameter:38mm,Length:520mm,Plate Size:150*150*5mm
Weight	3.73KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Hollow Scaffolding Screw Jack
Item No	NXSBJ002
Size	Diameter:38mm,Length:570mm,Plate Size:150*150*5mm
Weight	3.4KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Solid Scaffolding Screw Jack
Item No	NXSBJ003
Size	Diameter:32mm,Length:600mm,Plate Size:120*120*5mm
Weight	5.55KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Scaffolding Swivel Screw Jack
Item No	NXSBJ004
Size	Diameter:38mm,Length:700mm,Plate Size:150*150*5mm
Weight	4.35KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Specification	Seamless Tube
Item No	NXSBJ005
Size	Length:Customized,Tube:38*5mm
Weight	S355JR
Surface finishing	Black Self

「SCAFFOLDING C TYPE CLAMPS」

Make scaffolding more sturdy and safe to use with peace of mind



SCAFFOLDING C TYPE CLAMPS

Scaffolding C Type Clamps are used for connected to the steel beam, while the other side can be attached with the scaffolding clamps, make installation easy.

- 🏠 45# Steel Material with heating treatment
- 📏 Clamping rang 38,51,65,105mm
- 🔧 Quick installation and high durability
- 🔗 Forged one-piece type sturdy welding with a ring



Specification	Scaffolding C Type Clamps
Item No	NXCTC3801
Opening Size	38MM
Material	Body:45# Steel Bolt:40cr Steel
Weight	0.56KG
Surface finishing	Colour Electro Galvanizing



Specification	Scaffolding C Type Clamps
Item No	NXCTC3802
Opening Size	38MM
Material	Body:45# Steel Bolt:40cr Steel
Weight	0.50KG
Surface finishing	Colour Electro Galvanizing



Specification	Scaffolding C Type Clamps
Item No	NXCTC3803
Opening Size	38MM
Material	Body:45# Steel Bolt:40cr Steel
Weight	0.45KG
Surface finishing	Colour Electro Galvanizing



Specification	Scaffolding C Type Clamps
Item No	NXCTC3804
Opening Size	38MM
Material	Body:45# Steel Bolt:40cr Steel
Weight	0.68KG
Surface finishing	Colour Electro Galvanizing



Specification	Scaffolding C Type Clamps
Item No	NXCTC3805
Opening Size	38MM
Material	Body:45# Steel Bolt:40cr Steel
Weight	0.66KG
Surface finishing	Colour Electro Galvanizing



Specification	Scaffolding C Type Clamps
Item No	NXCTC3806
Opening Size	65MM
Material	Body:45# Steel Bolt:40cr Steel
Weight	1.2KG
Surface finishing	Colour Electro Galvanizing



Specification	Scaffolding C Type Clamps
Item No	NXCTC3807
Opening Size	105MM
Material	Body:45# Steel Bolt:40cr Steel
Weight	1.45KG
Surface finishing	Colour Electro Galvanizing

「SCAFFOLDING LEDGER END」

Make scaffolding more sturdy and safe to use with peace of mind



SCAFFOLDING LEDGER END

Scaffolding Ledger End is welded at two sides of ringlock ledger, designed to connect other scaffolding elements to ensure the stability and safety of the entire scaffolding structure.

- 🔥 Lost Wax Casting
- 🔩 25# Steel Material
- 🛡️ Rust-proof Treatment
- 🔍 100% Full Inspection
- 📦 Wooden Case Packing




Specification	Scaffolding Ledger End
Item No	NXLE001
Material	25# Steel
Weight	0.65KG
Surface finishing	Self Black/Electro Galvanized
Package	1850pcs/wooden box



Specification	Scaffolding Ledger End
Item No	NXLE002
Material	25# Steel
Weight	0.36KG
Surface finishing	Self Black
Package	3000pcs/wooden box



Specification	Scaffolding Ledger End
Item No	NXLE003
Material	25# Steel
Weight	0.48KG
Surface finishing	Self Black
Package	2500pcs/wooden box



Name	Scaffolding Ledger End
Item No	NXLE004
Material	25# Steel
Weight	0.48KG
Surface finishing	Self Black
Package	2500pcs/wooden box



Name	Scaffolding Ledger End
Item No	NXLE005
Material	25# Steel
Weight	0.50KG
Surface finishing	Self Black
Package	2400pcs/wooden box



Name	Scaffolding Ledger End
Item No	NXLE006
Material	25# Steel
Weight	0.50KG
Surface finishing	Self Black
Package	2400pcs/wooden box



Specification	Scaffolding Ledger End
Item No	NXLE007
Material	25# Steel
Weight	0.58KG
Surface finishing	Self Black
Package	2000pcs/wooden box



Specification	Scaffolding Ledger End
Item No	NXLE008
Material	25# Steel
Weight	0.62KG
Surface finishing	Self Black
Package	1900pcs/wooden box



Name	Forged Wedge Pin For Ledger End
Item No	NXWP-001
Size	Length:136mm
Material	S235JR Steel
Weight	0.094KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Name	Wedge Pin For Ledger End
Item No	NXWP-002
Size	Length:140mm,Thickness:6.5mm
Material	S355JR Steel
Weight	0.123KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Name	Wedge Pin For Ledger End
Item No	NXWP-003
Size	Length:140mm,Thickness:7.0mm
Material	S355JR Steel
Weight	0.164KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Name	Wedge Pin For Ledger End
Item No	NXWP-004
Size	Length:137mm,Thickness:6.0mm
Material	S355JR Steel
Weight	0.123KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Name	Wedge Pin For Ledger End
Item No	NXWP-005
Size	Length:140mm,Thickness:6.0mm
Material	S355JR Steel
Weight	0.121KG
Surface finishing	Electro Galvanized/Hot Dip Galvanized



Name	Rosette for Ringlock Scaffolding
Item No	NXR001
Size	Diameter:123mm,Thickness:9.75mm
Material	S355JR Steel
Weight	0.5KG
Surface finishing	Heating Treatment



Name	Rosette for Ringlock Scaffolding
Item No	NXR002
Size	Diameter:123mm,Thickness:9.75mm
Material	S355JR Steel
Weight	0.45KG
Surface finishing	Heating Treatment



YOUTUBE



OFFICIAL WEBSITE

泰州力信五金制造有限公司

地址：江苏省泰州市姜堰区姜沈路118号

电话：86-523-88280018

传真：86-523-88280018

手机：86-13601472227

邮件：info@scaffcn.com

网址：<https://scaffcn.com>

<https://scaffoldingclamp.com>

<https://nexusscaffold.com>

TAIZHOU NEXUS METALWORK CO.,LTD.

Add: No.118, Jiangshen Road, Jiangyan District, Taizhou City, Jiangsu Province, China.

Tel: 86-523-88280018

Fax: 86-523-88280018

Mobile: 86-13601472227

Email: info@scaffcn.com

Website: <https://scaffcn.com>

<https://scaffoldingclamp.com>

<https://nexusscaffold.com>

Offer the parameters and characteristics of the sample are for reference only, NEXUS reserves the right to change product design and instructions, are subject to change without prior notice.